

RM-702 Two-Channel Remote Station

Analog Partyline Solutions

Linking
People
Together



RM-702

Key Features

- Selectable one- or two-channel communication
- Momentary/latching talk buttons
- Individual call buttons
- Visual call signaling
- Balanced audio input with program interrupt (IFB)
- Hot mic and line-level outputs
- Studio announce output with relay
- Optional plug-in gooseneck mic
- Wide-range, high-output speaker
- LED buttons for Talk, Call, Announce

Clear-Com Encore® is a 2-wire analog partyline system with intuitive plug-and-play design and superior “Clear-Com Sound” audio clarity.

Description

The RM-702 is a 1RU two-channel remote station with programmable front panel buttons and individual channel volume control. The RM-702 is powered directly from the intercom line and requires no external AC power. Unlike the MS-702, the RM-702 has no power supply, circuit breaker or linking function.

Monitoring System

The RM-702 can monitor intercom activity on one or both channels with individual volume level controls. Monitoring intercom activity is possible through a headset or the internal high sensitivity loudspeaker.

Talk Selection

The RM-702 has mic pre-amps with limiters. An individual electronic momentary/latching Talk button is available for each channel. Illuminated dual-action Talk buttons light an LED dimly when latched: blue-color while in standby, amber-color when latched. The latching feature can be disabled. The channels can be accessed separately or simultaneously without tying them together. A selector switch toggles between the headset or microphone. The Talk buttons can also be controlled with a footswitch.

Call Signaling

The RM-702 features individual call buttons and visual call signaling to attract the attention of operators who have removed their headsets or turned off their speakers. The visual signal flashes the illuminated Talk button when a call is received. The call signaling feature can be programmed to the Talk buttons.

Program Interrupt (IFB)

The RM-702 accepts either a balanced or unbalanced line-level audio input through the DB-15 connector on the rear panel. The program can be monitored at the station or fed into another channel where it can also be set up for IFB/Program Interrupt from this or any other station.

RM-702 Two-Channel Remote Station

Analog Partyline Solutions

Technical Specifications

dBu is an absolute measurement.
0dBu is referenced to 0.775 volts RMS

Panel Microphone Input

Input Type: Electret
Input Impedance: $\geq 2K$
Mic Limiter Threshold: 0dBu $\pm 3dB$
Mic Limiter Range: $\geq 20dB$

Headset Microphone Input

Input Type: Dynamic
Input Impedance: $\geq 1K$
Mic Limiter Threshold: 0dBu $\pm 3dB$
Mic Limiter Range: $\geq 15dB$

Program Line Input

Maximum Level before Clipping: $\geq 20dBu$
Input Impedance: $\geq 5K$

Headset Output

Load Impedance: ≥ 8
Output Impedance: ≤ 25
Output Limiter Threshold: +5dBu $\pm 3dB$
Maximum Output Level before Distortion: $\geq 17dBu$

Speaker Output

Load Impedance: ≥ 4
Max Output Level before 1% Distortion: 20dBu $\pm 2dBu$

Partyline Output

Output Noise: $< -74dBu$
Output Impedance: $> 10K$

Partyline Input

Crosstalk: $< -60dB$
Max level before Clipping: $\geq 12dBu$
Sidetone Null Capability: $> 25dB$

Stage Announce/Balanced Line Out

Type: Balanced
Output Impedance: ≥ 200
Load Impedance: ≥ 600

IFB/Hot Mic

Type: Unbalanced
Output Impedance: 180
Load Impedance: ≥ 600

Frequency Response

Panel Mic - Partyline: 600 - 10kHz $\pm 3dB$
Headset Mic - Partyline: 200 - 12kHz $\pm 3dB$
Headset Mic - Line Out: 200 - 12kHz $\pm 3dB$
Program Input - Partyline: 100 - 17kHz $\pm 3dB$
Program Input - Headset Out: 200 - 10kHz $\pm 3dB$
Program Input - Speaker Out: 300 - 10kHz $\pm 3dB$
Partyline - Headset Out:

200 - 10kHz $\pm 3dB$

Partyline - Speaker Out: 300 - 10kHz $\pm 3dB$

Max Distortion

Panel Mic - Partyline: $\leq 0.5\%$
Headset Mic - Partyline: $\leq 0.5\%$
Headset Mic - Line Out: $\leq 0.5\%$
Program Input - Partyline: $\leq 0.2\%$
Program Input - Headset Out: $\leq 0.2\%$
Program Input - Speaker Out: $\leq 0.5\%$
Partyline - Headset Out: $\leq 0.2\%$
Partyline - Speaker Out: $\leq 0.5\%$

Noise

Panel Mic - Partyline: $< -65dBu$
Headset Mic - Partyline: $< -70dBu$
Headset Mic - Line Out: $< -55dBu$
Program Input - Partyline: $< -85dBu$
Program Input - Headset Out: $< -60dBu$
Program Input - Speaker Out: $< -60dBu$
Partyline - Headset Out: $< -50dBu$
Partyline - Speaker Out: $< -50dBu$

Max Gain

Panel Mic - Partyline: $\geq 37dB$
Headset Mic - Partyline: 41dB $\pm 2dB$
Headset Mic - Hot Mic Out: 55dB $\pm 3dB$
Headset Mic - Announce Out: 55dB $\pm 3dB$
Program Input - Partyline: $\geq -16dB$
Program Input - Headset Out: $\geq 18dB$
Program Input - Speaker Out: $\geq 24dB$
Partyline - Headset Out: $\geq 34dB$
Partyline - Speaker Out: $\geq 40dB$

Min Gain

Panel Mic - Partyline: $\leq 25dB$

Power

Input Voltage Range: 20-30V DC
Input Current (Idle): $\leq 90mA$
Input Current (Max): $\leq 110mA$

Environmental

32° - 122°F (0° - 50°C)


Dimensions

1.75 x 19 x 7.0in (HxWxD)
(44 x 483 x 178mm)


Weight

5.2lbs (2.4kg)

RM-702 Front Panel

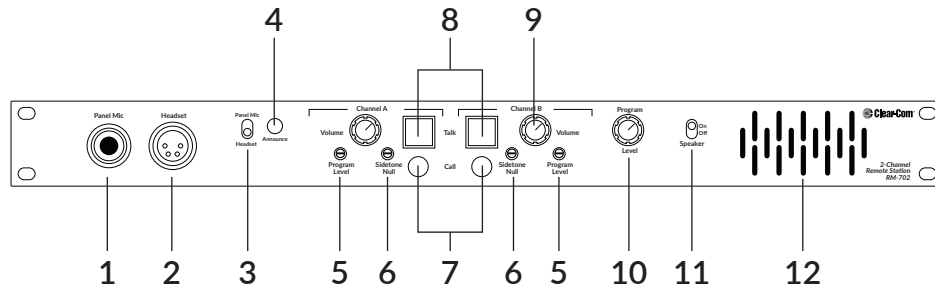

RM-702 Back Panel

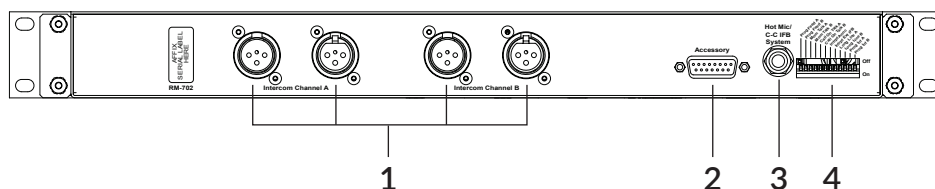

Legend

Front Panel

1. Microphone connector
2. XLR-4M Headset connector
3. Mic Selector Switch
4. Announce button
5. Program Level control
6. Sidetone Null control
7. Call buttons
8. Talk buttons
9. Volume control
10. Program level control
11. Speaker ON/Off switch
12. Loudspeaker

Back Panel

1. Intercom Channel connectors
2. AUX connector
3. Hot Mic/IFB Output
4. Dip Switches

Order Code

RM-702



www.clearcom.com/encore-knowledge-center/



www.clearcom.com

© 2022 Clear-Com LLC. All rights reserved.
Clear-Com Encore, Clear-Com, and the Clear-Com logo are registered trademarks of Clear-Com LLC.

Notice About Specifications | While Clear-Com makes every attempt to maintain the accuracy of the information contained in its documentation, that information is subject to change without notice. Performance specifications included in this document are design-center specifications and are included for customer guidance and to facilitate system installation. Actual operating performance may vary.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.CA.Gov